

## Standard Pleated Blind

### Product Information

Verosol's **Standard Pleated Blind** combines the soft appeal of a curtain with the versatility and simplicity of a blind. The ideal solution for heat and light control, and the blind almost disappears when raised. Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window.

Pleated Blinds with Guide Wires are a great idea when installing blinds on internal doors, as well as an ideal solution for boats and motor homes.

In addition to the standard, pleated blinds are available in an array of different shapes and configurations in order to accommodate even the most obscure window.

### Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit [www.verosol.com.au](http://www.verosol.com.au)



### Technical Information

Product Code	P200.0		P200.1	
Product Name	Standard Pleated Blind			
Operation	Cord Operation		Profile Operation / Incline Pleat	
Dimensions	Width	300mm min - 3400mm max	Width	300mm min - 1500mm max
	Drop	200mm min - 3200mm max	Drop	200mm min - 3200mm max
	Cord Lock	3400mm min width	Cord Lock	N/A
	Maximum Area	10m <sup>2</sup>	Maximum Area	4.8m <sup>2</sup>
Head Rail	Material	Extruded Aluminium Alloy - Aysmmetric Profile		
	Dimensions	33mm W x 20mm H		
Bottom Rail	Material	Extruded Aluminium Alloy - Aysmmetric Profile		
	Dimensions	30mm W x 12mm H		
	Colours	Coordinated - Refer to "Pleated Rail Chart"		
	Paint	Electrostatic Powder Coated and Baked		
Inner Rail	Material	UV Stabilised Acrylonitrile Butadiene Styrebe [ABS] Plastic		
End Caps	Material	UV Stabilised Polymer Acrylic		
	Colour	Coordinated - Refer to "Pleated Rail Chart"		
Lift and Blind Cords	Material	Braided Polyester [minimum diamter: 2.2mm]		
	Colour	Coordinated - Refer to "Pleated Rail Chart"		
Control Lock	Material	ULTEM / PPS-Fortran		
	Type	Front Mounted		
	Colour	Grey with coordinated colour		
Cord Position	Lift Cords 70mm from edge; Maximum spacing 500mm			
Installation Brackets	Material	Electro Plated Steel		
	Operation	Top or Face Fixing - concealed when installed		

Turn over for motorisation and optional extras

# Standard Pleated Blind

## Motorisation



Product Code	P200.5		P200.6
Product Name	Standard Motorised Pleat		Standard Motorised Pleat
Operation	24V AC Motorised		240V AC Motorised
Dimensions	Width	600mm minimum - 3000mm maximum	
	Drop	300mm minimum - 3200mm maximum	
	Maximum Area	10m <sup>2</sup>	
More Information	visit <a href="http://www.verosol.com.au">www.verosol.com.au</a>		

## Optional

Guide Wire System	Angle	Up to 15° angle from vertical
	Maximum Width	1500mm
	Maximum Area	4.8m <sup>2</sup>
	Cable	Stainless steel woven wire cable, 20mm from edge
Bottom Installation Bracket	Material	Electroplated Steel Bracket or Nylon Plate

## System Diagrams

### Standard Pleated Blind

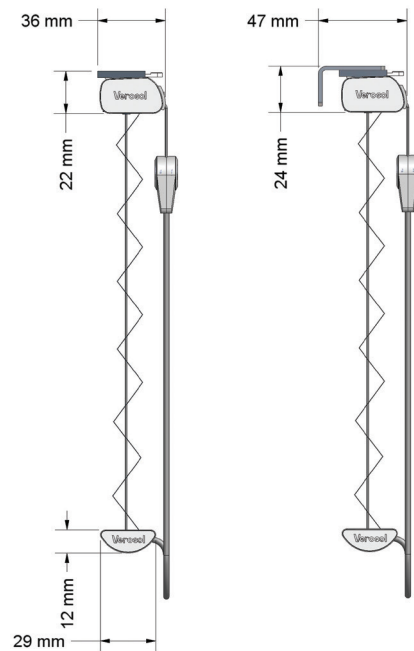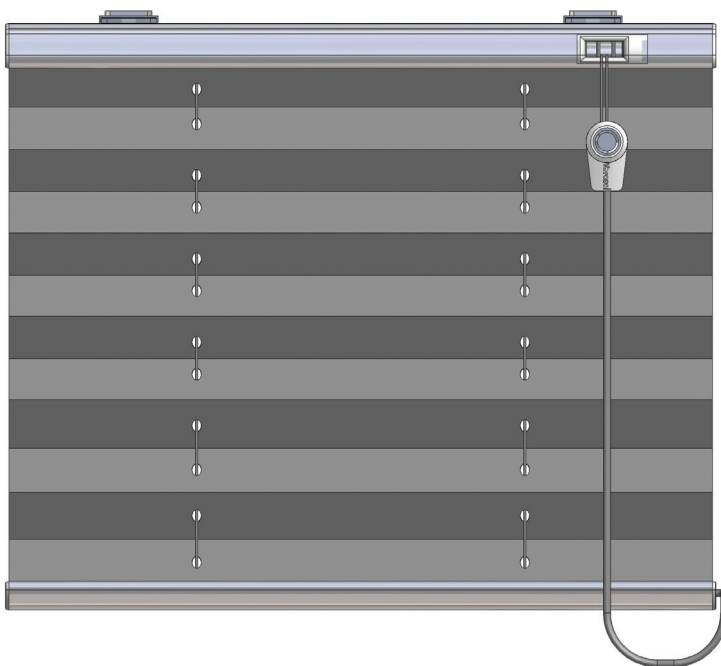

Top Fix

Face Fix

\* When the maximum fabric segment width of 2200mm is exceeded, blinds will have two segments with an overlap in centre of blind. If you have a specific requirement to match wide width fabric to window mullions, please specify and detail this on your order.

\*\* The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm. VeroCell fabric cannot be joined, and cannot have fabric cut-outs.